


CAT5 AV Splitter

Broadcast Audio and Video to 4 additional remote monitors over a single CAT5 cable.

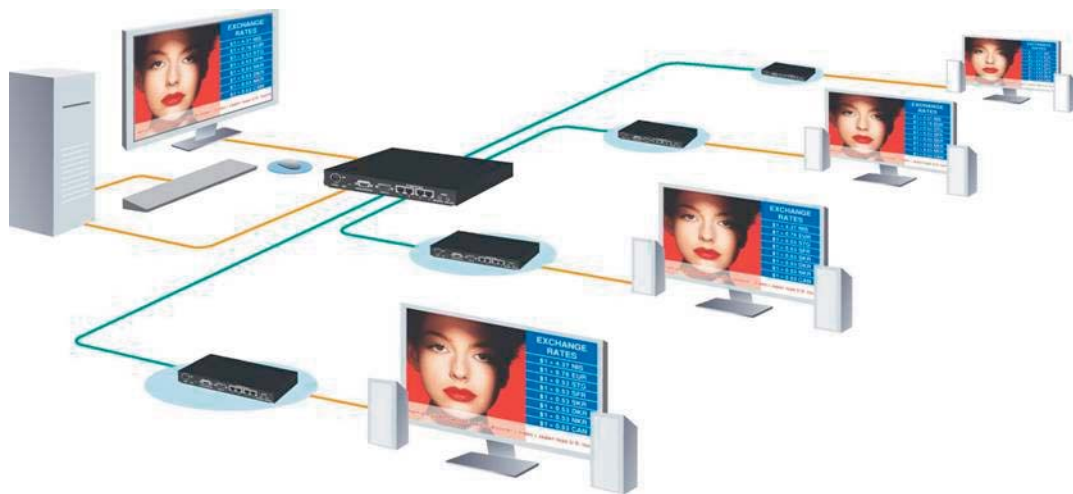

- Broadcast over 250M (1/4 Kilometer) over CAT5 cable.
- Multimedia broadcasting - Transmits both audio and video.
- Simple plug and plate installation.
- Volume adjustment at the remote unit.
- High quality stereo audio broadcasting.

Minicom CAT5 AV Splitter broadcasts a single video source, with audio to up to 4 remote monitors. All 4 remote monitors can be located at various locations at a distance of up to 250M.

The AV Splitter has full audio capability.

Single CAT5 Connectivity



The system comprises of a central unit at the main monitor and a dedicated remote unit at each of the four remote displays. The two units are connected by a single CAT5 cable, resulting in a very tidy installation - simply plug and play.

Broadcast Audio / Video to 250m

Minicom 3 year warranty

CAT5 AV Splitter

4 Displays over CAT5 cable - up to 250M

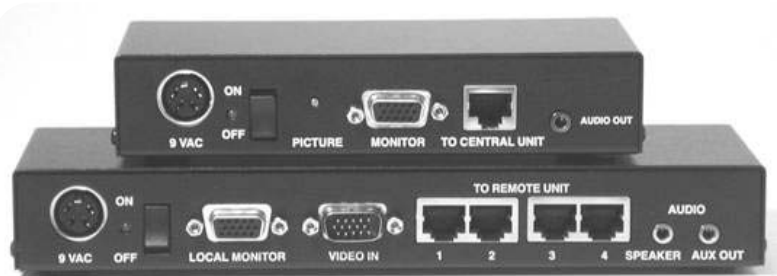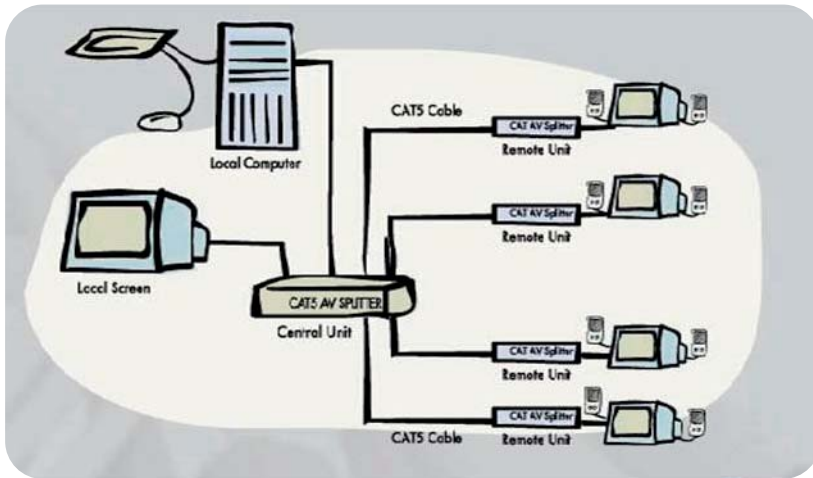

Specifications

System

Model	Central 2 & 4 Ports/Remote
System Cable	CAT5, FTP Solid Wire 2x4x24 AWG RJ45
Maximum Distance	110m/360ft
Cascadable	Yes
Video	VGA, SVGA, XGA
Resolution	1280x1024 @75 Hz
Dimensions	Central 2/4 ports: 31Hx79Dx224Wmm / 1.22Hx3.11Dx8.82W" Remote Unit: 31Hx79Dx157Wmm / 1.22Hx3.11Dx6.18W"
Weight	450g/260g
Shipping Weight	1.76kg/1.2kg
Power Supply	External 110V or 220V 9V 2A
Operating Temperature	0° C to 40° C/32° F to 104° F
Storage Temperature	-40° C to 40° C/-40° F to 104° F
Warranty=	3 Years
VGA to CPU	HD15M - HD15F

Ordering Information

CAT5 AV SPLITTER CENTRAL 2 PORTS (220V)	OVS22006
CAT5 AV SPLITTER CENTRAL 4 PORTS (220V)	OVS22008
CAT5 AV SPLITTER REMOTE 110m / 360ft (220V)	OVS21006