


## CAT5 AV Extender

Extend a plasma screen up to 110M from its player...

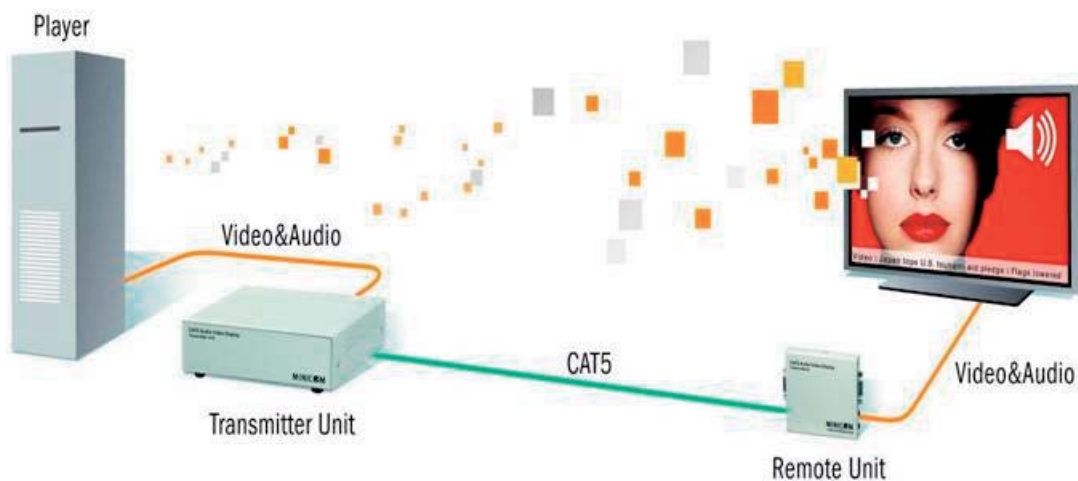

- Distribute to any type of display device over flexible CAT5 cable.
- High resolution support (1200 x 1600@75hz)
- Extend display up to 110M from the player / computer.
- Out-of-band - frees network from heavy image transfer.
- No player or computer required at display end.
- Optional 2 button control accessory via serial port.

### **Transmit audio / video from any type of player to multiple display devices.**

A one-to-one, player-to-plasma/LCD system for transmission of high quality audio and video, the AV extender transmits rich multimedia from any type of player/computer to any type of electronic display device over standard shielded CAT5 cable.

### **Install the display unit where it is most effective.**

The AV Extender provides the flexibility you need for a customised digital signage installation, enabling you to position display devices up to 110M from the player. Mount display devices strategically in public view; keep the hardware needed to run multimedia content out of public reach.

### **Digital signage**

The AV Extender is one of the most cost effective solutions to get a digital signage system up and running in your location. The cost of plasmas with built in CPU can be prohibitive; using the AV Extender a dedicated out-of-band system can lower the cost of displays significantly.

## Extend Audio & Video to 110m

## Minicom 3 year warranty

# CAT5 AV Extender



- Distribute to any type of display device over flexible CAT5 cable.
- High resolution support (1200 x 1600@75hz)
- Extend display up to 110M from the player / computer.
- Out-of-band - frees network from heavy image transfer.

## Specifications

### System

Resolution	Up to 1600x1200 @ 75Hz (depending on cable length)
System Cable	CAT5 Shielded FTP Cable
Maximum Distance	110m/360ft
RS232 Connection	Bi-directional Transmit Receive Only, RXD, TXD
Shipping Weight	880g/1.94lbs
Operating Temperature	5° C to 40° C/41° F to 104° F
Storage Temperature	40° C to 70° C/-40° F to 158° F
Warranty	3 Years

	Local Unit	Remote Unit
Cables and Connectors	VGA In - HDD15M RS232 - DB9F VGA Out - HDD15F	VGA Out - HDD15F RS232 - DB9M
Power Adaptor	External Power Adaptor 6VDC	External Power Adaptor 6VDC
Dimensions	23Hx63Dx78Wmm / 0.91Hx2.48Dx3.07W"	23Hx63Dx78Wmm / 0.91Hx2.48Dx3.07W"
	175g/0.39lb	155g/0.34lb

### Ordering Information

CAT5 VIDEO DATA TRANSMITTER (Local + Remote)	0VS2300
--	---------