


## CAT5 VGA Data Transmitter

Transmit video content and control RS-232 Devices

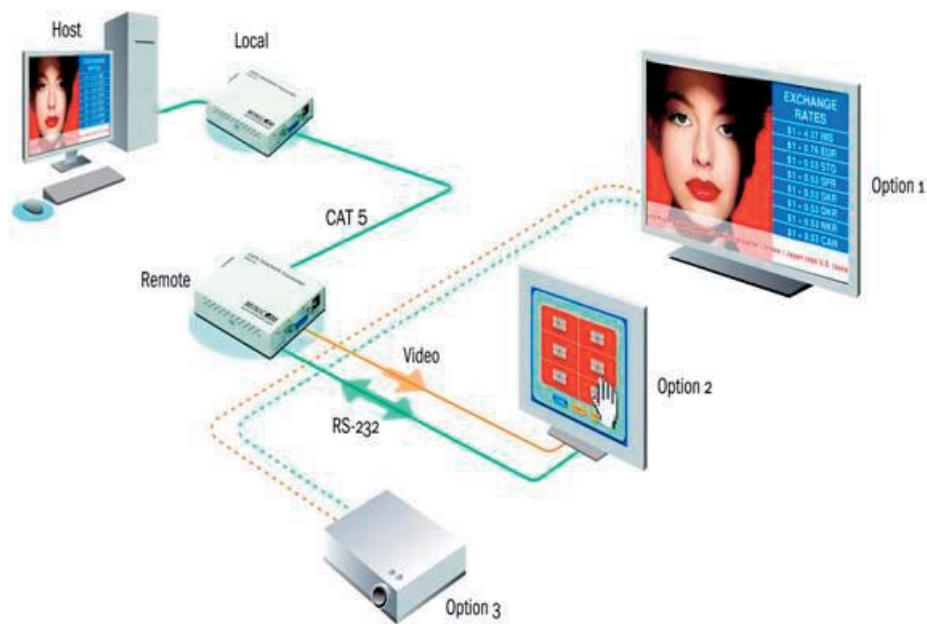

- Transmit high resolution video content to distant display device and control it remotely.
- Bidirectional Serial RS-232 (Tx/Rx) control.
- Extend displays up to 110M/330ft over a single CAT5 cable.
- Out-of-band, pure hardware solution - real time screen transfers, no software conflicts.
- Connection for local monitor at host station.

### Dual function video and bidirectional RS-232 extender.

A point-to-point real-time video and RS-232 extender, the VDT transmits high quality video and bidirectional RS-232 Tx/Rx signals from any type of player/computer to any type of electronic display device over standard, shielded CAT5 cable.

### Network-free digital signage solution.

As a dedicated, out-of-band system, VDT is the most efficient, reliable way to ensure real time delivery of rich, dynamic content without burdening the network. Content can be transmitted up to 110M/330ft from the player to a distant projector.

### Control remote video applications via bidirectional serial control.

Bidirectional RS-232 transmit/receive signals enable VDT control over remote video applications. For example you can transmit video to a remote touch screen and use the RS-232 connection to run the application.


VDT is also ideal for transmitting video images to a ceiling projector and controlling it from a desk.

## Extend Video Content to 110m

## Minicom 3 year warranty

# CAT5 VGA Data Transmitter

Transmit video content to a projector or screen 110M from source.

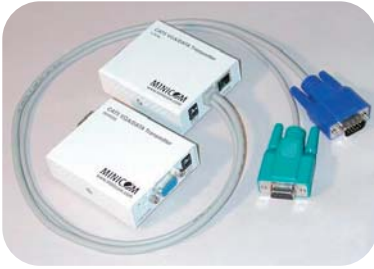

## VGA Data Transmitter - Local & Remote Units

Part No. 0VS230003

## Specifications

### System

Resolution	Up to 1600x1200 @ 75Hz (depending on cable length)	
System Cable	CAT5 Shielded FTP Cable	
Maximum Distance	110m/360ft	
RS232 Connection	Bi-directional Transmit Receive Only, RXD, TXD	
Shipping Weight	880g/1.94lbs	
Operating Temperature	5° C to 40° C/41° F to 104° F	
Storage Temperature	40° C to 70° C/-40° F to 158° F	
Warranty	3 Years	

	<b>Local Unit</b>	Remote Unit
Cables and Connectors	VGA In - HDD15M RS232 - DB9F VGA Out - HDD15F VGA Out - HDD15F	VGA Out - HDD15F RS232 - DB9M
Power Adaptor	External Power Adaptor 6VDC	External Power Adaptor 6VDC
Dimensions	23Hx63Dx78Wmm / 0.91Hx2.48Dx3.07W"	23Hx63Dx78Wmm / 0.91Hx2.48Dx3.07W"
Weight	175g/0.39lb	155g/0.34lb

### Ordering Information

CAT5 VIDEO DATA TRANSMITTER (Local + Remote)	0VS23003
--	----------