

## IP Control

Compact, remote KVM access to your computers and servers



- BIOS level access of computers and servers from any location
- Proprietary video compression algorithms for near-local video performance and mouse synchronization
- Secure, 128-bit SSL data encryption
- Remote Serial control of power switches, routers and other devices
- Configuration definitions for most KVM switches

### Preserve your KVM investment

The IP Control is a state-of-the-art IP device for remote, out-of-band KVM access to computers and servers. It provides KVM/IP access and Serial/IP control for data centers and server rooms that use legacy KVM systems to manage their IT hardware. A uniquely affordable IP extension device, IP Control is ideal for mainstream desktop environments and small-medium businesses that run mission-critical applications at remote locations.

### Third party KVM support

IP Control is designed for compatibility with your installed KVM base, making it the perfect add-on device. You can attach the palm-size IP Control to almost any switch or server. It comes with configuration definitions for all Minicom and most 3rd party KVM switches.

### Superior video and mouse performance

Featuring proprietary technology, IP Control provides superior video quality, mouse control, and BIOS level access over LAN, WAN and Internet. This enables a remote user's experience to look and feel local even though it's over an Internet TCP/IP connection.

### Control both KVM and Serial devices remotely through a single interface.

The built-in Serial port enables remote Serial control of power switches, routers, headless servers, and power management devices with secure, 128-bit SSL encrypted access.


### Ideal for digital signage remote player control

IP Control enables control and maintenance of remote digital signage players from a central control room. It provides command, in real time, and with virtually no extra cost, of content running on any number of video servers and enables troubleshooting even when the operating system is down.

## Access servers over legacy KVM network

## Minicom 3 year warranty

# Compact, remote KVM access to your computers and servers

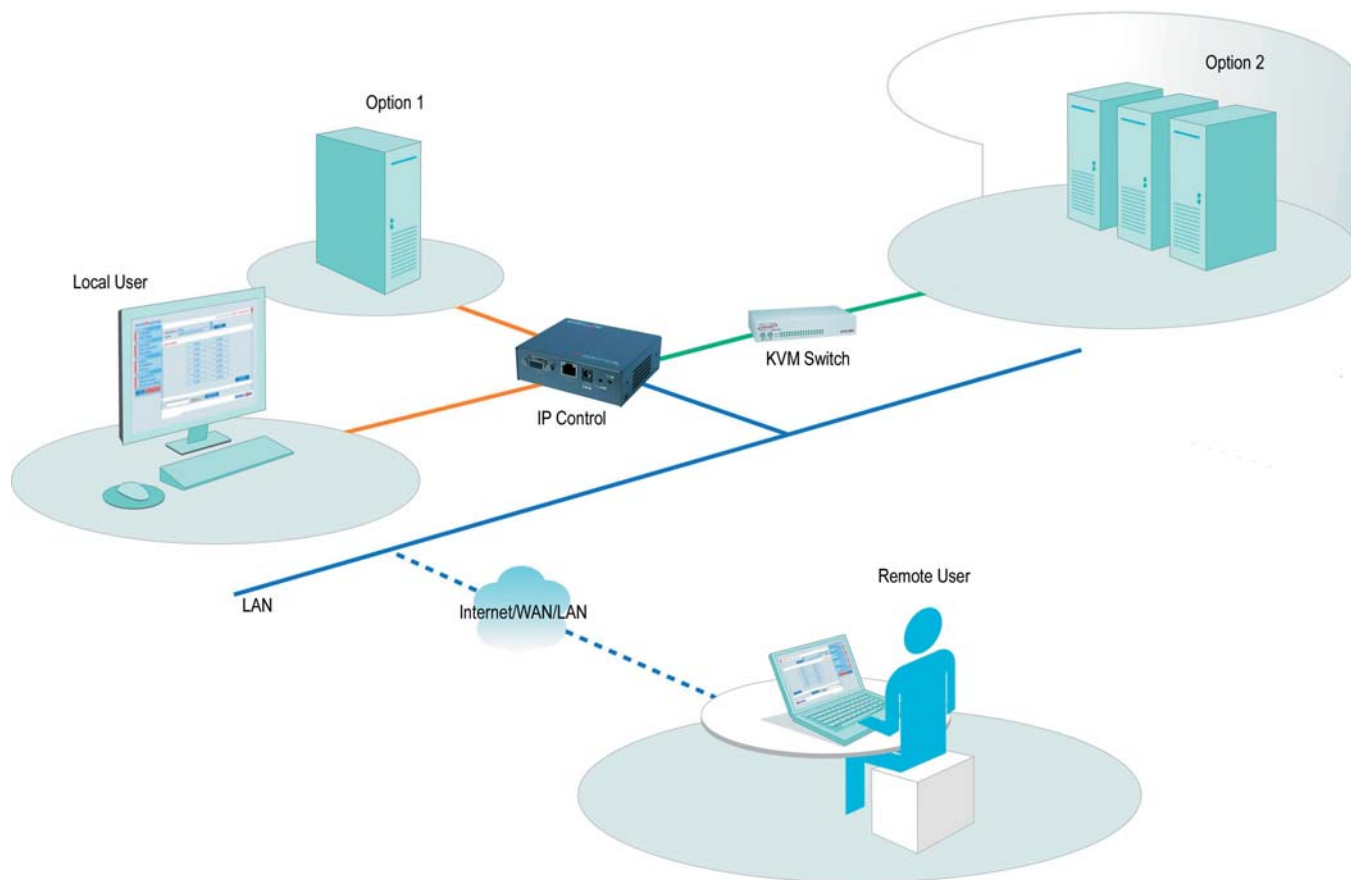

## Specifications

Operating systems	<b>Host Computer</b> DOS, Windows, Linux, Novell	<b>Client Computer</b> Windows 2000 or higher with IE 5.5 or higher and ActiveX
Resolution	<b>Host Computer</b> Up to 1600x1200 @85Hz	<b>Client Computer</b> Recommended resolution should be higher than resolution on local computer
Video and Mouse Synchronization	Both auto and manual modes	
Connections	<b>Ethernet</b> - RJ45 - 10/100 Mbit/sec auto sensing <b>Serial</b> - RJ45 <b>Local KVM connection</b> - Screen HDD15, Keyboard./Mouse - MiniDin6 <b>Computer / switch connection</b> - Screen HDD15, Keyboard./Mouse - MiniDin6 3 in 1 Cable 1.8m (supplied with system)	
Weight	0.20 kg / 0.45 lb	
Dimensions	3 x10 x 8 cm / 3.9 x 3.1 x 1.1 in	
Power supply	External power adapter 85 – 265 VAC 50 / 60 Hz	
Operating temp.	0°C to 40°C / 32°F to 104°F	